

## ULTRASONIC WIND SPEED AND DIRECTION SENSOR



**The ultrasonic wind sensor SUW1A manufactured by PM Ecology has been designed for constant use in harsh weather conditions. The corrosion resistant anodized aluminium housing and no moving parts design, make the sensor ideal for long-term measurements with no maintenance required. Good performance in high winds as well as short response time to slight air movements provides accurate wind speed and direction measurements.**

### INSTALLATION

The sensor is fully configured and ready for on-site installation. It has been designed for constant, maintenance-free measurements with no calibration required.

Next to one of the four sensor's transducers, there is a marker indicating North. To ensure the correct readings of wind direction, the sensor must be mounted with the marker facing North

### OUTPUT SIGNAL

The ultrasonic wind sensor offers SDI-12 output and operates with every data logger manufactured by PM Ecology compatible with this communication standard

### FEATURES

**Maintenance free – no moving parts**

**Compact, robust and durable**

**Made of corrosion resistant anodized aluminium**

**Output signal – SDI-12**

**Optional heating**

**High long-term stability**

SDI-12 (Serial Digital Interface at 1200 baud) is a serial communications protocol used in environmental measurements. The operating principle is that only an SDI-compatible device with the digital addressing system will communicate with a the pre-configured sensors. SDI-12 sensors have a three-wire connection where 2 wires power the sensor and the third one transmits the data.

### HOUSING

The housing is made of anodized high corrosion resistant aluminium. The sensor is fully dust-tight and waterproof. The protection standard of the electronics and (ultrasonic) sensing elements complies with IP67 marking.

### HEATING


The optional heating enables the constant work of the sensor in harsh weather conditions like freezing rain, sleet, snow and high humidity accompanied by low temperatures.

The heating circuit works independently of the sensor's power supply and allows the use of a different power source. Heating is switched on automatically when the temperature drops below 4°C.

## MAIN APPLICATIONS

- Automatic weather stations
- Wind condition study
- Wind turbine monitoring
- Building automation
- Agro-meteorological stations
- Building cranes
- Remote site measurements
- Road & rail weather stations

## DIMENSIONS (mm)

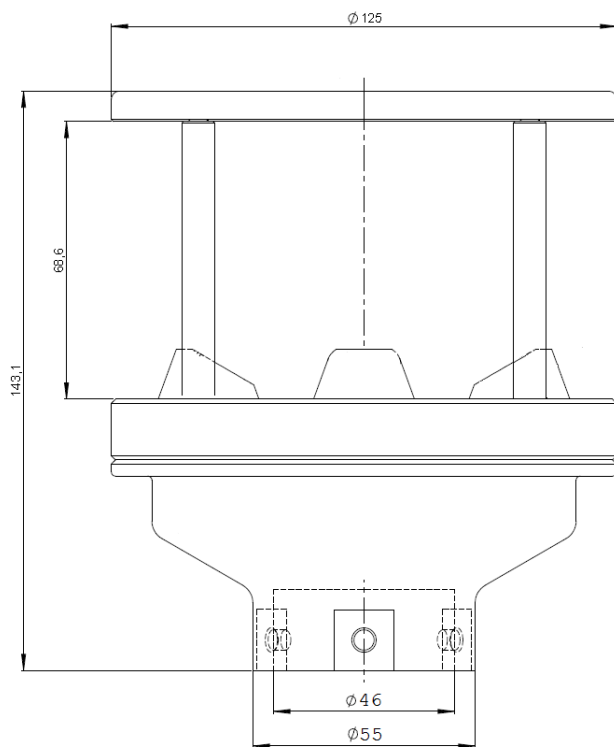

## TECHNICAL SPECIFICATION

Type	SUW1A
Working temperature	-35 ... +70°C
Wind direction resolution	1°
Wind direction range	0° - 359°
Wind direction accuracy	±2° (at 12 m/s)
Wind speed resolution	0,01 m/s
Wind speed range	0 – 60 m/s
Wind speed accuracy	±2° (at 12 m/s)
Sensor's power supply	4 ... 16 Vdc
Output	SDI-12
Heating power supply (optional)	12Vdc or 24Vdc depending on version
Protection class	IP 67
Housing Material	High corrosion resistant aluminium
Mounting	Mounting on pipe with 44,5mm diameter
Cable length	1m, optional extension
Weight	1 kg

Copyright © 2017 PM Ecology. Specification sheet is a subject to change without notice.

### Contact and orders

info@pmecology.com  
+48 585 008 007

[www.pmecology.com](http://www.pmecology.com)